


# EP-M260

High Efficiency & Scale Production Metal Powder Bed Fusion

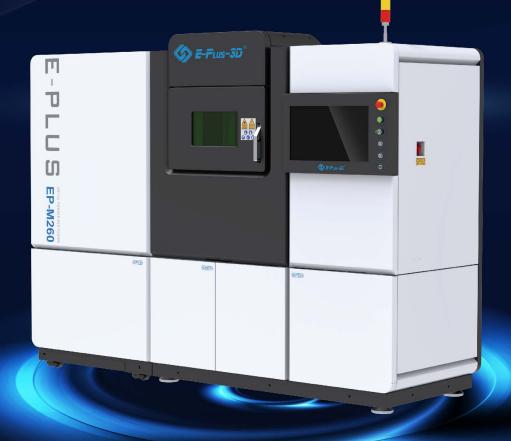

### **EP-M260**

The EP-M260 is an industrial metal 3D printer that uses advanced metal powder bed fusion (MPBF) technology. It is capable of easily and quickly converting CAD data into high-performance, complex structure metal parts. The 3D printer is an ideal choice for medium sized parts and small batch production.



#### **©** CONSISTENT PERFORMANCE

- · Innovative gas flow management and optimized filter system ensure a stable building environment.
- · Outstanding sealing capability optimizes oxygen content.
- · Precise laser beam quality control.



#### **W** HIGH PRODUCTIVITY

- · Dual-Laser system equipped with build volume of 266x266x390mm<sup>3</sup>.
- · Non-stop operation during filter change.
- · Optimized recoating strategy shortens coating time .



#### **©** RELIABLE AND EASY OPERATION

- · Convenient powder recycling systems and glove box structure minimize powder contact.
- · Intelligent software ensures less human intervention.
- $\cdot$  Real–time monitoring of the production environment and building process.



#### **© LOW OPERATION COST**

- · Quantitative powder feeding and coating ensure less powder waste.
- · Advanced filtration system significant increases filter lifetime.
- · Low inert gas consumption during purging and operation.









## EP-M260 PARAMETER

Machine Model	EP-M260
Build Chamber (XxYxZ)	266x266x390mm³
Optical System	Fiber Laser, 500W/1000W (single or dual-laser optional)
Spot Size	80~120 μ m
Max Scan Speed	8m/s
Building Speed (1)	Single laser: 15~35cm³/h Dual laser: 25~55cm³/h
Layer Thickness	20−120 µ m
Material	Titanium Alloy, Aluminium Alloy, Nickel Alloy, Maraging Steel, Stainless Steel, Cobalt Chrome, Copper Alloy, etc.
Power Supply	380V, 50/60Hz, 10KW, 24A ( Dual laser: 12KW, 30A )
Gas Supply	Ar/N <sub>2</sub>
Oxygen Content	≤100 ppm
Dimension (WxDxH)	2800x1300x2410mm³
Weight	2300kg
Software	EP Control, EPHatch
Input Data Format	STL or other Convertible File

<sup>(1)</sup> Building speed depends on the process parameter, material and laser etc.

<sup>\*</sup> EPLUS 3D reserves the right to explain any alteration of the specifications and pictures.